

°C

%RH

SHIMADEN

Series **SRS11/13/14**

SHIMADEN DIGITAL CONTROLLER



CE approved

RoHS compliance


BASIC FEATURES

- Multi-input and multi-range performance**
- Small instrument depths (62mm - 65mm) save space, thus securing a larger installation area.**
- SV setting: 3 points**
- PID Value: 3 types**
- 2-output heating and cooling control available**
- Total 32 steps Program available (optional)**
(1-4 pattern, 32-8 step)
- RS-485 Interface available (optional)**
(Master - slave function, Modbus/Shimaden Protocol)
- Heater break/heater loop alarm: Single/3-phase available**
- A wide selection of additional functions (optional) is available to suit various needs.**

Smaller instrument depths save space and secure a larger and flexible installation area.



SRS11 Series
(48×48)

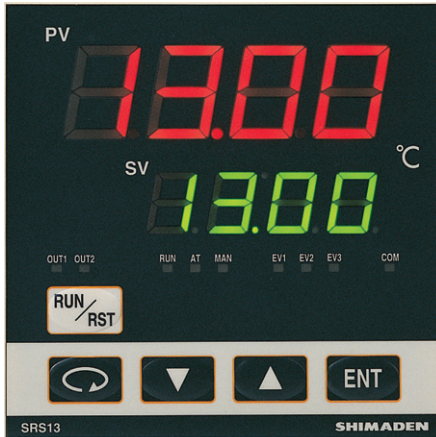


SRS 13 Series
(96×96)




SRS14 Series
(48×96)

Depth of the conventional instruments

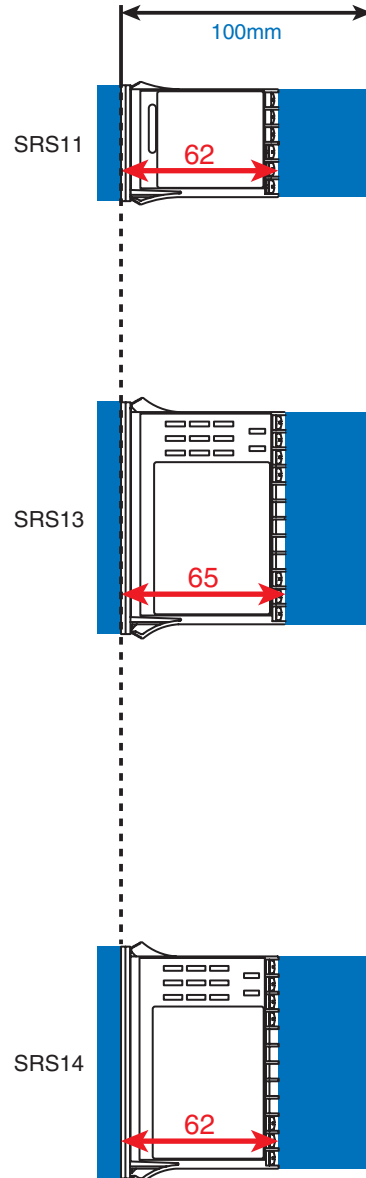


EXAMPLE OF 2-OUTPUT CONTROL BY SELECTING CONTROL OUTPUT 2


1) OUT 1 RA (heating)/OUT 2 DA (cooling) action

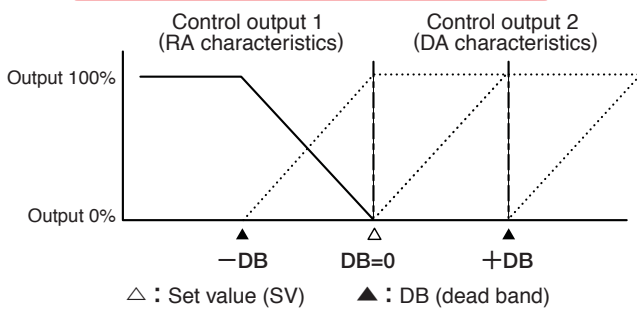

1) OUT 1 RA (heating)/OUT 2 RA (heating) action

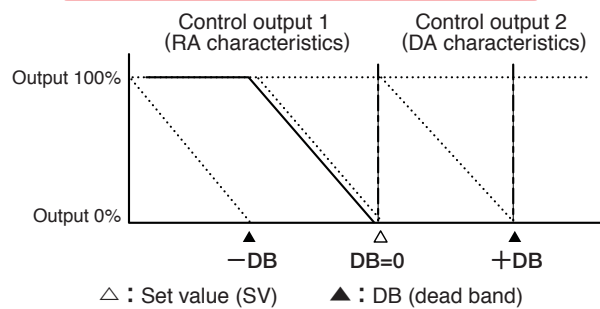


EXAMPLE OF TUNNEL FURNACE PROGRAM TEMPERATURE CONTROL

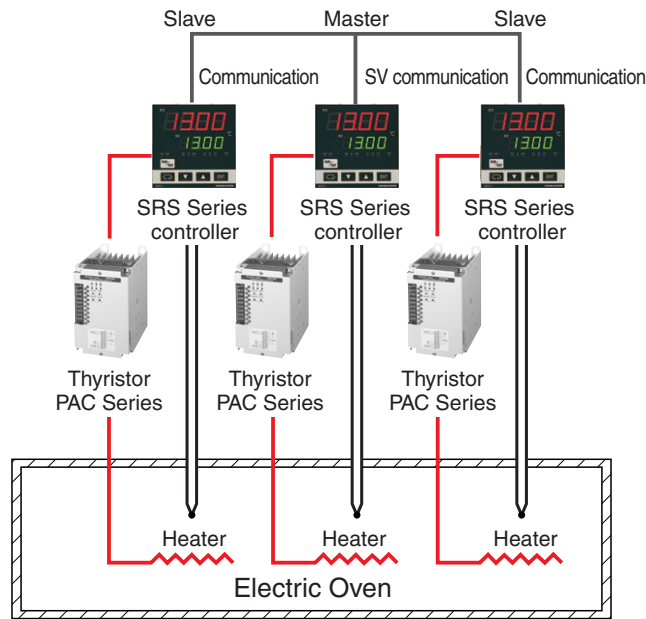


CT INPUT (CONTROL LOOP ALARM)

For 2 heating stages

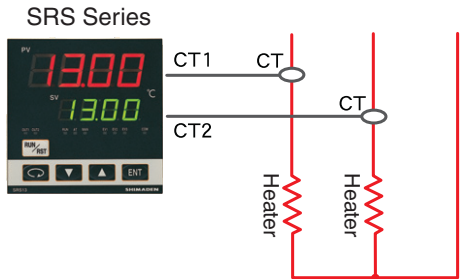

For three-phase

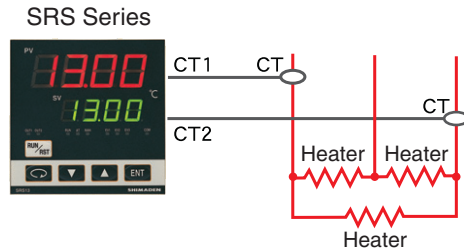

COMMUNICATION

Serial communication with PC/sequencer is possible by RS-485.



■ Display

- Display methods
 - Digital display : Measured value (PV)/7 segments red LED 4 digits, Target set value (SV)/7 segments green LED 4 digits
 - SRS11 PV height of character: Approx. 12mm SV height of character: Approx. 9mm
 - SRS13 PV height of character: Approx. 20mm SV height of character: Approx. 13mm
 - SRS14 PV height of character: Approx. 12mm SV height of character: Approx. 9mm
- Status display : LED lamp display
 - Green: RUN, AT, MAN, OUT1, OUT2, COM
 - Orange: EV1, EV2, EV3
- Display accuracy : $\pm(0.25\% \text{ FS} + 1 \text{ digit})$ Excluding cold junction temperature compensation accuracy of thermocouple input
 - Accuracy if set value is lower than -100°C with K, T, U thermocouples is $\pm 0.7\% \text{ FS}$.
 - Accuracy guarantee not applicable to 400°C and below of B thermocouple.
- Display accuracy maintaining range : $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$
- Display resolution : Depends on measuring range and scaling (0.001, 0.01, 0.1, 1)
- Measured value display range : $-10 \sim 110\%$ of measuring range
 - (Range of Pt-200 \sim 600 $^{\circ}\text{C}$ is $-240 \sim 680^{\circ}\text{C}$, range of JPt-200 \sim 500 $^{\circ}\text{C}$ is $-240 \sim 570^{\circ}\text{C}$.)
- Display updating cycle : 0.25 seconds
- Input scaling : Scaling possible for voltage (mV, V) input ($-1999 \sim 9999$ span $10 \sim 10000$ position of decimal point can be changed.)

■ Setting

- Setting method : By operating 5 keys (PARA, DOWN, UP, ENT, RUN/RST) on the front panel
- Target value setting range : Same as measuring range (within setting limiter)
- Set value limiter : Individual setting for higher and lower limits, any value is selectable within measuring range.
 - (Lower limit value < Higher limit value)
- Key lock : OFF, 1 \sim 3 (4 level)
 - OFF: No key lock
 - 1: Only user setting screen group and communication mode can be changed.
 - 2: Only SV and communication mode can be changed.
 - 3: Only key lock can be changed.

■ Input

- Type of input : Selectable from multiple (TC, Pt, mV) and voltage (V)
- Thermocouple : B, R, S, K, E, J, T, N, PLII, WR₅-26, {U, L(DIN43710)}, Metal-chromel (AuFe-Cr)
 - Input resistance : 500k Ω minimum
 - External resistance tolerance : 100 Ω maximum
 - Burnout function : Standard feature (up scale)
 - Cold junction compensation accuracy : $\pm 2^{\circ}\text{C}$ (between 5 and 45°C of ambient temperature), $\pm 3^{\circ}\text{C}$ if mounted closely
- R.T.D. : Pt100/JPt100, 3-wire type
 - Amperage : 0.25mA
 - Lead wire tolerance resistance : 5 Ω maximum/wire (3 lead wires should have the same resistance.)
- Voltage mV : $-10 \sim 10, 0 \sim 10, 0 \sim 20, 0 \sim 50, 10 \sim 50, 0 \sim 100 \text{ mV DC}$
 - V : $-1 \sim 1, 0 \sim 1, 0 \sim 2, 0 \sim 5, 1 \sim 5, 0 \sim 10 \text{ V DC}$
 - Input resistance : 500k Ω minimum
 - Current input (0 \sim 20, 4 \sim 20mA DC) is handled through external receiving impedance (250 Ω).
- Input scaling function : Scaling possible for voltage (mV, V) input
 - Scaling range : $-1999 \sim 9999$ counts
 - Span : $10 \sim 10000$ counts
 - Position of decimal point : None, 1, 2 and 3 digits on the right of decimal point
- Sampling cycle : 0.25 seconds
- PV bias : $-1999 \sim 2000$ units
- PV filter : $0 \sim 9999$ seconds
- PV gain : $-5.00 \sim +5.00\%$
- Isolation : Not insulated from input, system, DI, and CT input but insulated from others

■ Control

- Control mode
 - With 1 outputs : Expert PID control with auto tuning function
 - With 2 outputs : Expert PID control with auto tuning function PID (output 1) + PID (output2)
- Type of control/rating : Contact/1a 240V AC 2A (resistive load) 1.2A (inductive load)
 - SSR drive voltage/12V \pm 1.5V DC (Maximum load current 30mA)
 - Current/4 \sim 20mA DC (maximum load resistance 600 Ω)
 - Voltage/0 \sim 10V DC (maximum load current 2mA)
- Control output resolution : Control output 1: approx. 0.0125% (1/8000)
Control output 2: approx. 0.5% (1/200)
- Output accuracy : Control output 1: $\pm 1.0\% \text{ FS}$ (5 \sim 100% output)
Control output 2: $\pm 2.0\% \text{ FS}$ (5 \sim 100% output)
- Control output 1
 - Proportional band (P) : OFF, 0.1 \sim 999.9%FS (ON-OFF action by OFF)
 - Integral time (I) : OFF, 1 \sim 6000 seconds (P or PD action by OFF)
 - Derivative time (D) : OFF, 1 \sim 3600 seconds (P or PI action by OFF)
 - Target value function : OFF, 0.01 \sim 1.00
 - ON-OFF hysteresis : 1 \sim 999 units (Effective when P=OFF)
 - Manual reset : $-50.0 \sim 50.0\%$ (Effective when I=OFF)
 - Output limiter : Lower limit 0.0 \sim 99.9%, higher limit 0.1 \sim 100.0% (Lower limit value < Higher limit value)
 - Proportional cycle : 1 \sim 120 seconds (for contact and SSR drive voltage output)
- Control output 2 (option)
 - Proportional band (P) : OFF, 0.1 \sim 999.9%FS (ON-OFF action by OFF)
 - Integral time (I) : OFF, 1 \sim 6000 seconds (P or PD action by OFF)
 - Derivative time (D) : OFF, 1 \sim 3600 seconds (P or PI action by OFF)
 - Target value function : OFF, 0.01 \sim 1.00
 - ON-OFF hysteresis : 1 \sim 999 units (Effective when P=OFF)
 - Dead band : $-1999 \sim 5000$ units (Overlap with a negative value)

- Output limiter : Lower limit 0.0~99.9%, higher limit 0.1~100.0% (Lower limit value<Higher limit value)
- Proportional cycle : 1~120 seconds (for contact and SSR drive voltage output)
- Manual control
 - Output setting range : 0.0~100.0% setting resolution: 0.1%
 - Manual ↔ auto switching : Balanceless bumpless (within proportional range)
- Soft start : Set individually for output 1 and output 2
 - OFF, 1~100 seconds
- AT point : SV value in execution
- Control output characteristic : RA (reverse action characteristic)/DA (direct action characteristic) switching by front key or communication
 - Set individually for output 1 and output 2
 - RA (reverse action characteristic): heating action
 - DA (direct action characteristic): cooling action
- Isolation : Contact output isolated from all
 - Analog output not insulated from SSR drive voltage, current and voltage output but insulated from others (Control output 1 and 2 not insulated other than contact output)
- **Event output (option, 3 points maximum)**
- Number of output points : 3 points maximum (EV1, EV2, EV3)
 - However, EV3 is exclusive selection from control output 2 and DI4.
- Types : Selectable from the following 18 types for EV1, EV2 and EV3:
 - no assignment, higher limit deviation alarm, lower limit deviation alarm, outside higher/lower limit deviation alarm, inside higher/lower limit deviation alarm, higher limit absolute value alarm, lower limit absolute value alarm, scaleover, EXE signal (RUN signal), heater 1 break/loop alarm, heater 2 break/loop alarm, step signal, pattern signal, program end signal, hold signal, program signal, upslope signal, downslope signal
- Event setting range
 - Absolute values : within measuring range (both higher limit and lower limit)
 - Deviations : -1999~2000 units (both higher limit and lower limit)
 - Higher/lower limit deviations : 0~2000 units (within/outside)
- Event action : ON-OFF action
- Hysteresis : 1~999 units
- Standby action : Selectable from following 4 types
 - 1 Without standby action
 - 2 Standby 1 (when power is applied, STBY (RST)→EXE (RUN))
 - 3 Standby 2 (when power is applied, STBY (RST)→EXE (RUN), execution SV is changed.)
 - 4 Control mode (without standby action: no alarm is output at the time of abnormal input.)
- Output type/rating : Contact (EV1, EV2/ 1a x 2 points common EV3/ 1a independent)/ 240V AC 2A (resistive load)
- Output updating cycle : 0.25 seconds
- Latching function : Alarm action holding function (can be assigned for deviation alarm/absolute value alarm and heater break alarm)
 - ON (effective)/OFF (not effective) selection
 - Unlatched by key operation, DI or communication when latching
- Output characteristic : Selectable from NO and NC
- Isolation : Isolated from all
- **Programming function (option)**
- No. of pattern : Maximum 4 patterns (can be set to 1, 2 and 4)
- No. of step : Maximum 8 steps (4 patterns), 16 (2 patterns), 32 (1 pattern)
 - Total number of steps = 32
- No. of PID type : Maximum 3
- Time setting : 0 minutes 0 seconds~99 minutes 59 seconds/1 step or 0 hours 0 minutes~99 hours 59 minutes/1 step
- Setting resolution : 1 minute or 1 second
- Time accuracy : ±(setting time x 0.005 + 0.25 seconds)
- Setting parameter for each step : SV, step time, PID No.
- No. of pattern execution : Maximum 9999
- PV start : ON/OFF
- Hold : Possible either by front panel key input, external control input or communication
- Advance : Possible either by front panel key input, external control input or communication
- Power failure compensation : None (setting contents are maintained and elapsed time, execution step and number of execution are reset.)
- **External control input (DI) (option)**
- Number of input points SRS11 : Maximum 4 points: Exclusive selection with 3 points CT input (DI1, DI2, DI3)
 - Exclusive selection with 1 point (DI4), control output 2 and event output (EV3)
- SRS13, SRS14 : Maximum 4 points: 3 points (DI1, DI2, DI3) no exclusive selection
 - Exclusive selection with 1 point (DI4), control output 2 and event output (EV3)
- Type of DI assignment : Selectable from the following 12 types for each DI.
 - No assignment, EXE1 (RUN1) (control execution/suspension), EXE2 (RUN2) (control execution/suspension), MAN (manual output), AT (auto tuning), ESV2 (SV external selection 2), PROG (programming), HLD (hold), ADV (advance), PTN2 (start pattern selection 2 bit), PTN3, (start pattern selection 3 bit), L_RS (unlatching)
 - Non-voltage contact or open collector (level action) Approx. 5V DC 1mA maximum
- Action input : Non-voltage contact or open collector (level action) Approx. 5V DC 1mA maximum
- Input minimum holding time : 0.25 seconds
- Isolation : Not insulated from DI input, system, and CT input but insulated from others
- **CT input (option)** : 2 points selectable if the type of control output (OUT1, OUT2) is contact or SSR
 - In case of SRS11, exclusive selection with DI1, DI2 and DI3
- Types of current detection target : Assignable for OUT1 and OUT2
- Current detection method : By CT sensor (sold separately)
- Current capacity : 30A/50A
- Current setting range : OFF, 0.1~50.0 A (alarm action off when set to OFF)
- Setting resolution : 0.1A
- Current display range : 0.0~55.0A
- Display accuracy : ±2.0 A (for sine wave 50 Hz)
- Alarm action : Heater break detection when control output ON: Alarm output ON
 - Heater loop alarm detection when control output OFF: Alarm output ON
- Alarm output : Assignable for event output (EV1, 2, 3)

- Minimum time for action confirmation : ± 0.25 seconds for both ON and OFF (each 0.5 second)
- Alarm maintain mode : Selectable from latching function ON (effective)/OFF (non-effective)
- Standby action : Selection of 0 (OFF) or 1 (ON) (Standby when power applied only)
- Sampling cycle : 125 msec
- Isolation : Not insulated from CT input, input, system and DI but insulated from others
- **Communication function (option) Exclusive selection with analog output for SRS11**
- Type of communication : EIA standard RS-485
- Communication system : 2-line half duplex start-stop synchronization system
- Communication speed : 1200, 2400, 4800, 9600, 19200, 38400 bps
- Data format : Selectable from 7E1, 7E2, 7N1, 7N2, 8E1, 8E2, 8N1, 8N2
- Communication delay time : 1~100 (x 0.512 msec)
- Max. number of connections : 32 including host
- Communication address : 1~255
- Communication code : ASCII, MODBUS RTU binary code only
- Communication protocol : Shimaden standard protocol / MODBUS ASCII, RTU
- Other: : Start character and BCC operating method can be selected.
- Communication memory mode : Selectable from EEPROM, RAM and r_E
- Communication master mode : Can be used as master device when using multiple units
- Start slave address setting : Broadcast, 1~255
- End slave address setting : Start address ~ start address +30
- Write-in data address setting : 0000H~FFFFH
- Communication distance : Max. 500 m (differs according to conditions)
- Isolation : Isolation for all
- **Analog output (option) Exclusive selection with communication for SRS11**
- Number of output points : 1 point
- Types of output : Selectable from measured value, target set value (execution SV), control output 1 and control output 2
- Output signal/rating : Current 4~20 mA DC (max. load resistance 300 Ω)
Voltage 0~10V DC (max. load current 2 mA)
Voltage 0~10mV DC (output resistance 10 Ω)
- Output scaling : Within measuring range or output range (Inversed scaling possible)
- Output accuracy : $\pm 0.3\%$ FS (for display value)
- Output resolution : Approx. 0.01% (1/10000)
- Output updating cycle : 0.25 seconds
- Output limiter : Can be set for both lower and higher limit (0.0~100.0%) Lower limit value < higher limit value
- Isolation : No isolation with control output P, I and V
- **General specifications**
- Data storage : Non-volatile memory (EEPROM)
- Ambient conditions for operations
 - Temperature : -10~50°C
 - Humidity : Max. 90%RH (no dew condensation)
 - Elevation : Max. 2000 m above sea level
 - Category : II
 - Pollution class : 2
- Storage temperature : -20~65°C
- Supply voltage : 100~240V AC $\pm 10\%$, 50/60Hz or 24V AC/DC $\pm 10\%$
- Input/noise removal ratio : Normal mode minimum 50dB (50/60 Hz)
- Insulation resistance : Between input/output terminals and power terminal Min. 500V DC, 20 M Ω
- Dielectric strength : Between input/output terminals and power terminal, 2300V AC, 1 minute
Between input and Y output, 2300V AC, 1 minute
Between input and P.I.V. output, 500V AC, 1 minute
- Power consumption

SRS11	:	Max. 11VA for 100~240V AC 6VA for 24V AC 4W for 24V DC
SRS13,14	:	Max. 14VA for 100~240V AC 8VA for 24V AC 6W for 24V DC
- Applicable standards

EMC	:	EN61326: 1997 (+Amendment 1 +Amendment 2 +Amendment 3: 2003)
Safety	:	IEC61010-1 and EN61010-1: 2001
- Material of case : PPO resin molding (equivalent of UL94V-1)
- External dimensions : SRS11: H48 x W48 x D66 mm (in panel 62mm)
SRS13: H96 x W96 x D69 mm (in panel 65mm)
SRS14: H96 x W48 x D66 mm (in panel 62mm)
- Panel thickness : 1.0~3.5mm
- Panel cutout : SRS11: H45 x W45 mm
SRS13: H92 x W92 mm
SRS14: H92 x W45 mm
- Weight : SRS11: Approx. 120 g
SRS13: Approx. 220 g
SRS14: Approx. 160 g

ITEM	CODE		SPECIFICATIONS
SERIES	SRS11-		DIN 48x48 Digital Controller
INPUT	8	Multi input	Thermocouple: B, R, S, K, E, J, T, N, PLII, WRe5-26, {U, L (DIN43710)}, AuFe-Cr R.T.D.: Pt100/JPt100 Voltage (mV): -10~10, 0~10, 0~20, 0~50, 0~100, 10~50mV DC Voltage (V): -1~1, 0~1, 0~2, 0~5, 1~5, 0~10V DC Current (mA): 0~20mA DC: (V) 0~5V DC 4~20mA DC: (V) 1~5V DC (applied via enclosed 250Ω shunt resistor)
	6		Scaling Possible (inverse scaling impossible) Range: -1999~9999 Span: 10~10000
CONTROL OUTPUT 1	Y		Contact: 1a, Contact capacity: 240V AC 2A/resistive load Proportional cycle: 1~120 sec.
	I		Current: 4~20mA DC Load resistance: 600Ω max.
	P		SSR drive voltage: 12V±1.5V DC/30mA max. Proportional cycle: 1~120 sec.
	V		Voltage: 0~10V DC Load current: 2mA max.
CONTROL OUTPUT 2 (OPTION)	N-		None
	Y-		Contact: 1a, Contact capacity: 240V AC 2A/resistive load Proportional cycle: 1~120 sec.
	I-		Current: 4~20mA DC Load resistance: 600Ω max.
	P-		SSR drive voltage: 12V±1.5V DC/30mA max. Proportional cycle: 0.5~120.0 sec.
	V-		Voltage: 0~10V DC Load current: 2mA max.
	E-	Additional event output	Additional event output 1 point (EV3)
D-	Additional external input control signal (DI)	Additional control input 1 point (DI4)	
POWER SUPPLY	90-		100~240V AC±10%, 50/60Hz
	08-		24V AC/DC±10%, 50/60Hz
PROGRAM FUNCTION (OPTION)	N		None
	P		Max. 4 patterns Total number of steps: 32
EVENT OUTPUT (OPTION)	0		None
	1		Event output 2 points (EV1, EV2)
ANALOG OUTPUT/ CONMMUNICATION FUNCTION (OPTION)	0		None
	3		0~10mVDC Output resistance: 10Ω
	4		4~20mADC Resistive load: 300Ω max.
	6		0~10VDC Load current: 2mA max.
EXTERNAL INPUT CONTROL SIGNAL (DI)/ CT INPUT (OPTION)	5		RS-485 (Shimaden standard protocol, MODBUS protocol)
	0		None
	1		CT input 2 points (CT sold separately)
REMARKS	2		Control input 3 points (DI1, DI2, DI3)
	0		Without
	9		With

OPTIONAL ACCESSORIES

Name	Code	Remarks
CT	QCC01	CT for 30A (CTL-6-S)
CT	QCC02	CT for 50A (CTL-12-S36-8)
Terminal cover	QCR001	For SRS11

ITEM	CODE		SPECIFICATIONS
SERIES	SRS13-		DIN 96x96 Digital Controller
	SRS14-		DIN 96x48 Digital Controller
INPUT	8	Multi input	Thermocouple: B, R, S, K, E, J, T, N, PLII, WRe5-26, {U, L (DIN43710)}, AuFe-Cr R.T.D.: Pt100/JPt100 Voltage (mV): -10~10, 0~10, 0~20, 0~50, 0~100, 10~50mV DC
	6		Voltage (V): -1~1, 0~1, 0~2, 0~5, 1~5, 0~10V DC Current (mA): 0~20mA DC: (V) 0~5V DC 4~20mA DC: (V) 1~5V DC (applied via enclosed 250Ω shunt resistor)
CONTROL OUTPUT 1	Y		Contact: 1a, Contact capacity: 240V AC 2A/resistive load Proportional cycle: 1~120 sec.
	I		Current: 4~20mA DC Load resistance: 600Ω max.
	P		SSR drive voltage: 12V±1.5V DC/30mA max. Proportional cycle: 1~120 sec.
	V		Voltage: 0~10V DC Load current: 2mA max.
CONTROL OUTPUT 2 (OPTION)	N-		None
	Y-		Contact: 1a, Contact capacity: 240V AC 2A/resistive load Proportional cycle: 1~120 sec.
	I-		Current: 4~20mA DC Load resistance: 600Ω max.
	P-		SSR drive voltage: 12V±1.5V DC/30mA max. Proportional cycle: 1~120.0 sec.
	V-		Voltage: 0~10V DC Load current: 2mA max.
	Additional event output	E-	
Additional external input control signal (DI)	D-		Additional control input 1 point (DI4)
POWER SUPPLY	90-		100~240V AC±10%, 50/60Hz
	08-		24V AC/DC±10%, 50/60Hz
PROGRAM FUNCTION (OPTION)	N		None
	P		Max. 4 patterns Total number of steps: 32
EVENT OUTPUT (OPTION)	0		None
	1		Event output 2 points (EV1, EV2)
ANALOG OUTPUT (OPTION)	0		None
	3		0~10mVDC Output resistance: 10Ω
	4		4~20mADC Resistive load: 300Ω max.
	6		0~10VDC Load current: 2mA max.
CT INPUT (OPTION)	0		None
	1		CT input 2 points (CT sold separately)
EXTERNAL INPUT CONTROL SIGNAL (DI) (OPTION)	0		None
	2		Control input 3 points (DI1, DI2, DI3)
COMMUNICATION FUNCTION (OPTION)	0		None
	5		RS-485 (Shimaden standard protocol, MODBUS protocol)
REMARKS	0		Without
	9		With

OPTIONAL ACCESSORIES

Name	Code	Remarks
CT	QCC01	CT for 30A (CTL-6-S)
CT	QCC02	CT for 50A (CTL-12-S36-8)
Terminal cover	QCR007	For SRS13, SRS14

Input Type		Code	Measuring range
Multi-input	Thermocouple	B	01 0 ~ 1800 °C *1
		R	02 0 ~ 1700 °C
		S	03 0 ~ 1700 °C
		K	04 -199.9 ~ 400.0 °C *2
			05 0.0 ~ 800.0 °C
		06 0 ~ 1200 °C	
		E	07 0 ~ 700 °C
		J	08 0 ~ 600 °C
		T	09 -199.9 ~ 200.0 °C *2
		N	10 0 ~ 1300 °C
		PLII	11 0 ~ 1300 °C *3
		WRe5-26	12 0 ~ 2300 °C *4
		U	13 -199.9 ~ 200.0 °C *2 *5
		L	14 0 ~ 600 °C *5
	Kelvin	K	15 10.0 ~ 350.0 K *6
		AuFe-Cr	16 0.0 ~ 350.0 K *7
		K	17 10 ~ 350 K *6
		AuFe-Cr	18 0 ~ 350 K *7
R.T.D.	Pt100	30 -100.0 ~ 350.0 °C	
		31 -200 ~ 600 °C	
		32 -100.0 ~ 100.0 °C	
		33 -50.0 ~ 50.0 °C	
		34 0.0 ~ 200.0 °C	
	JPt100	35 -200 ~ 500 °C	
		36 -100.0 ~ 100.0 °C	
		37 -50.0 ~ 50.0 °C	
		38 0.0 ~ 200.0 °C	
		39 100.0 ~ 350.0 °C	
Voltage (mV)	-10 ~ 10	71	
	0 ~ 10	72	
	0 ~ 20	73	
	0 ~ 50	74	
	0 ~ 100	75	
Voltage (V)	0 ~ 100	76	
	-1 ~ 1	81	
	0 ~ 1	82	
	0 ~ 2	83	
	0 ~ 5	84	
	0 ~ 10	85	
		86	

Measuring range can be set by scaling function within the following range.
Initial value: 0.0 ~ 100.0
Scaling range: -1999 ~ 9999 count
Span: 10 ~ 10,000 count
Decimal point position: None, 1/2/3 digits following decimal point
Lower limit value is less than higher limit value.
NOTE:
For current input, install input terminals of the specified receiving impedance (250Ω) and use code 84 (0 ~ 20mA) or 85 (4 ~ 20mA).

Thermocouple: B, R, S, K, E, J, T, N: JIS/IEC
R.T.D. Pt100: JIS/IEC JPt100

*1 Thermocouple:

B: Accuracy guarantee not applicable to 400°C or below.

*2 Thermocouple

K, T, U: Accuracy of those readings below -100.0°C is ±0.75% FS.

*3 Thermocouple

PLII: Platinel

*4 Thermocouple

WRe5-26: A product of Hoskins

*5 Thermocouple

U, L: DIN 43710

*6. Thermocouple K (Kelvin) accuracy

Temperature range External CJ Internal CJ

10.0 ~ 30.0 K ± (2.0%FS + [CJ error X 20] K + 1K)

30.0 ~ 70.0 K ± (1.0%FS + [CJ error X 7] K + 1K)

70.0 ~ 170.0 K ± (0.7%FS + [CJ error X 3] K + 1K)

170.0 ~ 270.0 K ± (0.5%FS + [CJ error X 1.5] K + 1K)

270.0 ~ 350.0 K ± (0.3%FS + [CJ error X 1] K + 1K)

*7. Thermocouple Metal-chromel (AuFe-Cr) (Kelvin) accuracy

Temperature range External CJ Internal CJ

0.0 ~ 30.0 K ± (0.7%FS + [CJ error X 3] K + 1K)

30.0 ~ 70.0 K ± (0.5%FS + [CJ error X 1.5] K + 1K)

70.0 ~ 170.0 K ± (0.3%FS + [CJ error X 1.2] K + 1K)

170.0 ~ 280.0 K ± (0.3%FS + [CJ error X 1] K + 1K)

280.0 ~ 350.0 K ± (0.5%FS + [CJ error X 1] K + 1K)

NOTE:

For current input, install input terminals of the specified receiving impedance (250Ω) and use code 84 (0 ~ 20 mA) or 85 (4 ~ 20 mA).



NOTE:

Unless otherwise specified, the measuring range will be set as follows when shipped from the factory:

Input	Standard/rating	Measuring range
Multi-input	K thermocouple	0.0 ~ 800.0°C
Voltage (V)	0 ~ 10V DC	0.0 ~ 100.0 no legend


OPTIONAL TERMINAL COVER

QCR001





SRS11

QCR007

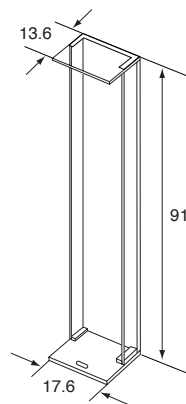




× 2 pcs.

SRS13 & SRS14

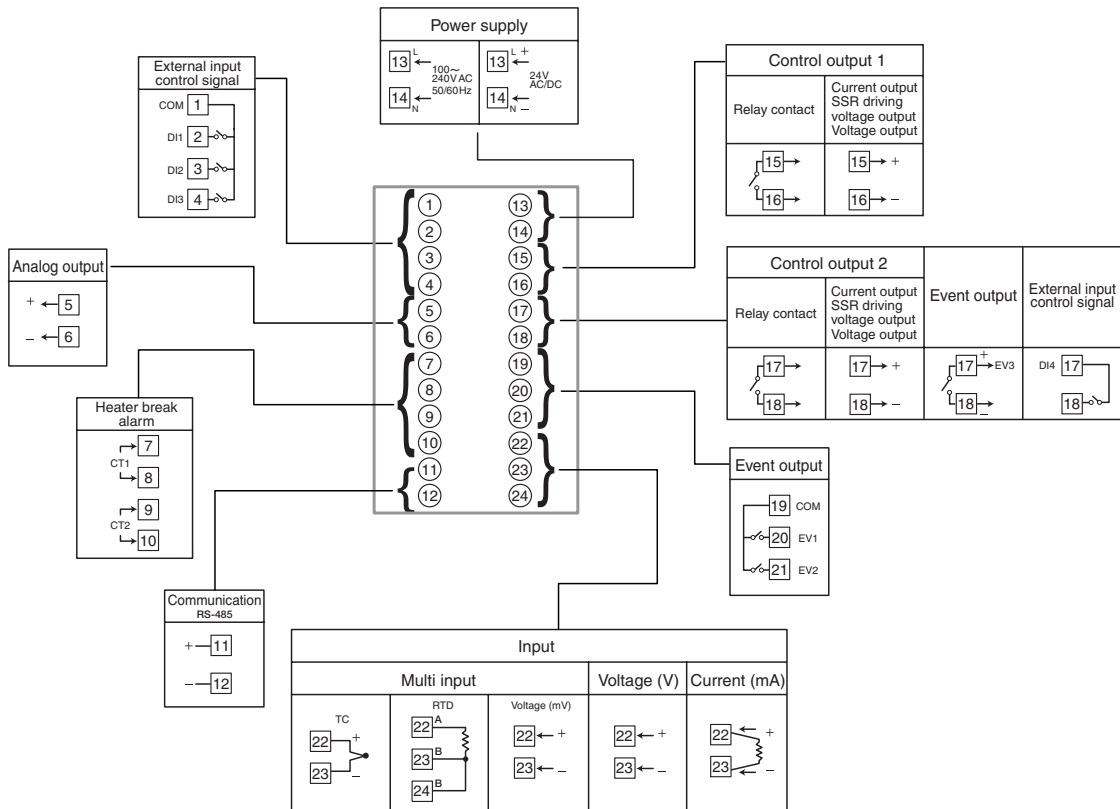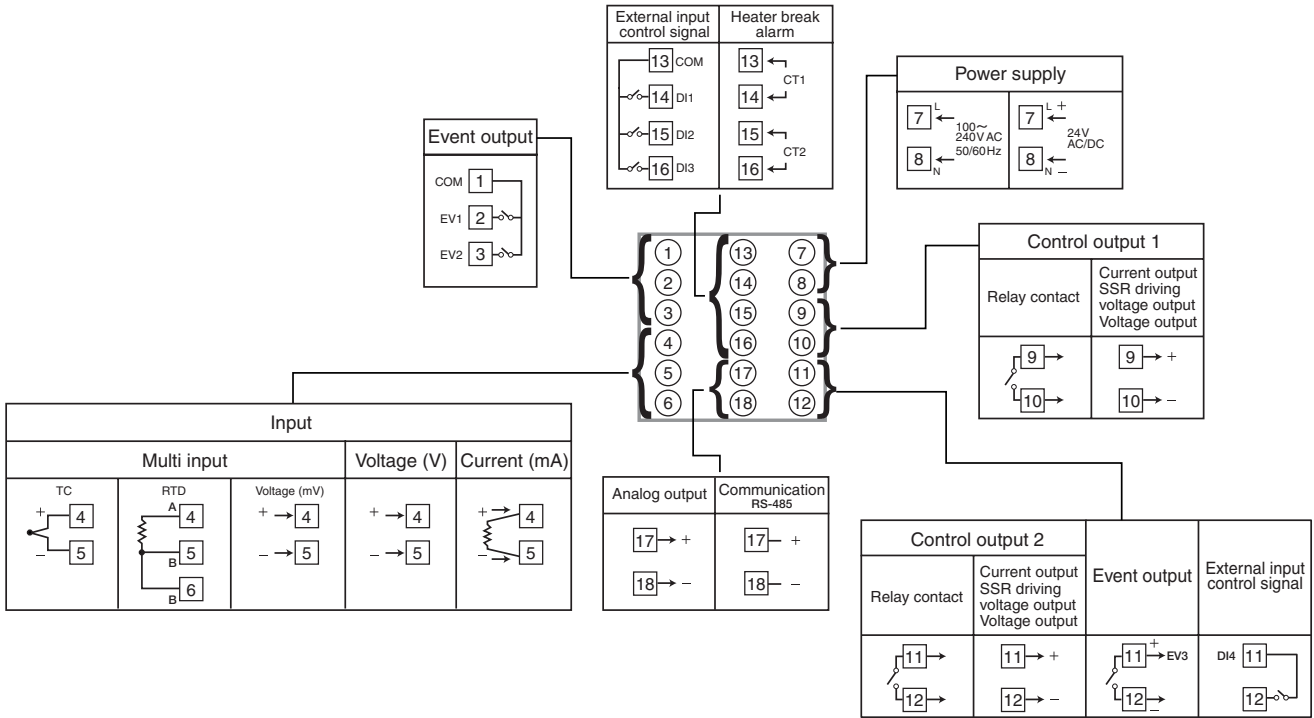




Unit: mm

◆ SRS11 Series

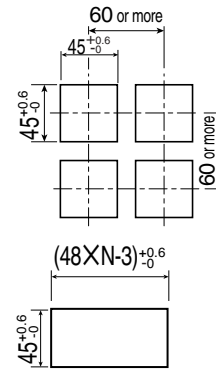




In the case of closely-mounted horizontally
 N=The number of instruments
 (When closely-mounted in series, cold junction compensation accuracy will be $\pm 3^{\circ}\text{C}$.)


◆ SRS13 Series

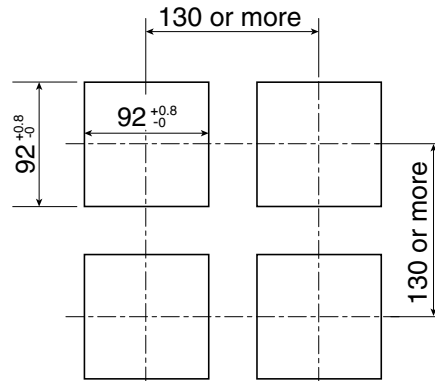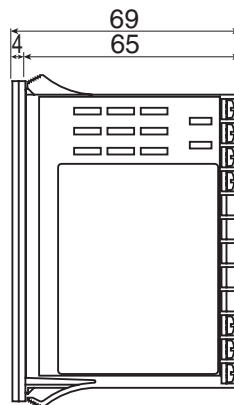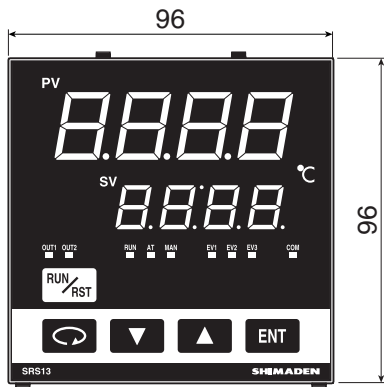


◆ SRS14 Series

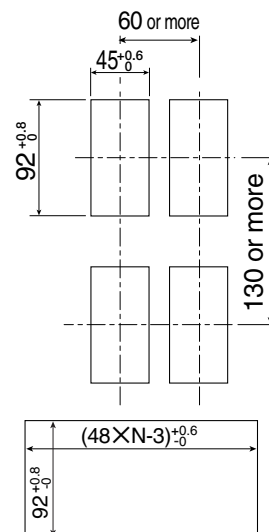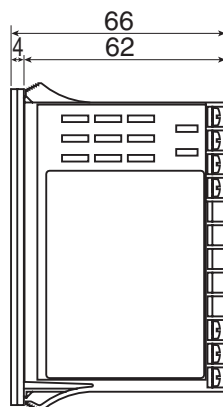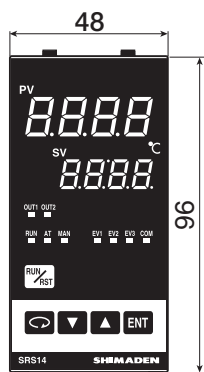


In the case of closely-mounted horizontally
 N=The number of instruments
 (When closely-mounted in series, cold junction compensation accuracy will be $\pm 3^{\circ}\text{C}$.)

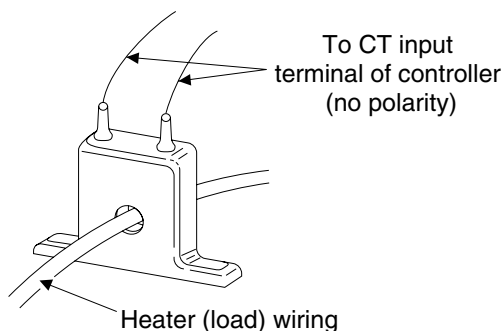

● CT FOR 30A (QCC01)

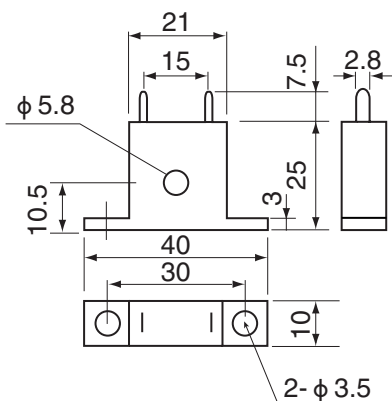

● CT FOR 50A (QCC02)

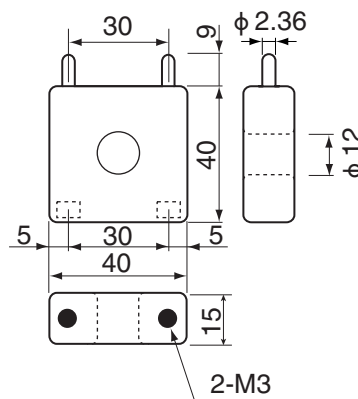

Unit: mm

Warning

- The SRS Series is designed for the control of temperature, humidity and other physical values of general industrial equipment. It is not to be used for any purpose which regulates the prevention of serious effects on human life or safety.

Caution

- If the possibility of loss or damage to your system or property as a result of failure of any part of the process exists, proper safety measures must be made before the instrument is put into use so as to prevent the occurrence of trouble.

(The contents of this brochure are subject to change without notice.)

Temperature and Humidity Control Specialists
SHIMADEN CO., LTD.
 Head Office: 2-30-10 Kitamachi, Nerima-Ku, Tokyo 179-0081 Japan
 Phone: +81-3-3931-7891 Fax: +81-3-3931-3089
 E-MAIL: exp-dept@shimaden.co.jp URL: http://www.shimaden.co.jp

ISO 9001 ISO 14001

UKAS QUALITY MANAGEMENT 001
 UKAS ENVIRONMENTAL MANAGEMENT 001